

HABS. CAL. 319

HABS
CAL.

19- Los AN.

7-

La Casa De Don Vicente Lugo
516-522 $\frac{1}{2}$ No. Los Angeles Street,
Los Angeles, Los Angeles County, Calif.

PHOTOGRAPHS
WRITTEN HISTORICAL AND DESCRIPTIVE DATA
District of California. #3.

Historic American Buildings Survey
Henry F. Withey, District Officer
407 So. Western Avenue,
Los Angeles, California.

LA CASA DE DON VICENTE LUGO
516-522½ No. Los Angeles Street,
Los Angeles, Los Angeles County, Calif.

Owner: Lillian M. Moore, 450 Mission St, San Francisco, Cal.

Date of erection: Some time between 1835 - 1840

Architect: Unknown.

Builder: "

Present condition: Fairly well preserved. The building has undergone many changes through the years, to meet the requirements of various tenants.

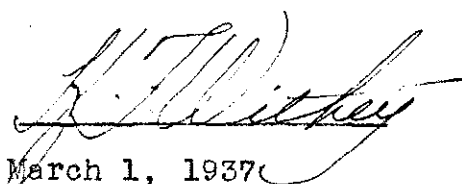
Most of the front balcony has been enclosed and a high pitch shingle roof and dormer windows have replaced the original flat brea-covered roof.

Number of stories: Two.

Materials of construction: Exterior walls of brick, interior walls and floors of wood frame. Cast iron posts and steel beams carry the loads over the first story front, and cast iron posts support the girders of interior partitions, and floors. interior plastered. Originally the building had a flat roof and walls are reported to have been of adobe but none seem to remain.

Other existing records: A dascription and photographs in "Doors of Yesterday" by Marion Parks, also "In Pursuit of Vanished Days". 1928 Annual of Historical Society of Southern California. An article by H. S. Barrows entitled "The Lugo Family of California" 1912-13 Annual of Southern California Historical Society p. 341

Additional Data: This house was built by Don Vicente Lugo. It is the last remaining of the former aristocratic houses about the Plaza. In 1856 it became the first home of St. Vicent's College, now Loyola, Southern California's pioneer college. Now occupied by stores with the second story rented as a rooming house for Chinese.


March 1, 1937

TW 7/16/37